


PATCH LEADS

We offer a wide variety of patch leads and can also manufacture to various specifications to ensure you have exactly what you need for your particular application. If your need requires that extra level of protection then our armoured solution can withstand even the roughest of handling.

Fibre Construction Profile

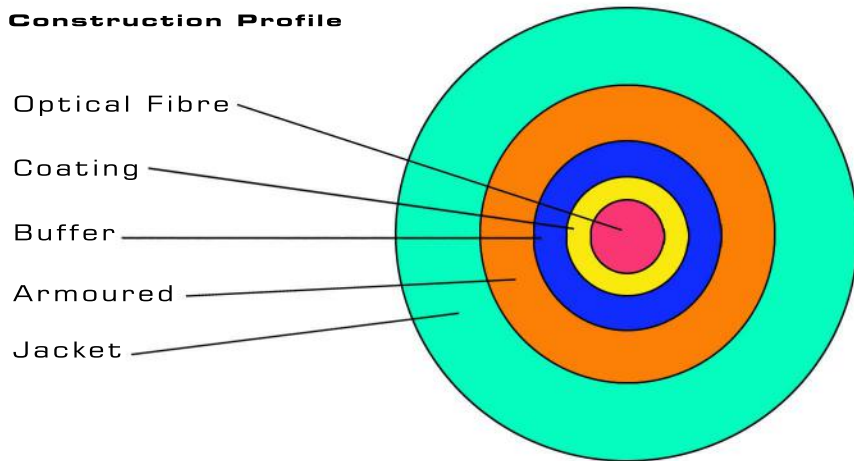

Key Features:

- Suitable for indoor/ outdoor use
- LSZH
- Various lengths available
- Standard colour is white but various colours available on request
- Un-terminated & pre-terminated lengths
- Available in FC-LC, FC-SC/APC, FC-SC, FC-LC/APc, FC-FC as standard. Other variations available on request

Cable Parameters

Unit/Spec

Tight Buffered Fibre Dimension	850±50um
Material	PVC
Outer Jacket Dimension	2.9±0.1mm
Material	LSZH
Colour	White
Strength Member	Armoured/ Kevlar

Mechanical and Environmental Characteristics

Tension (Long Term)	500N
Tension (Short Term)	1000N
Crush (Long Term)	500N/10cm
Crush (Short Term)	1000N/10cm
Min. Bend Radius (Dynamic)	20D
Min. Bend Radius (Static)	10D
Operate Temperature	-40oc~+60oc
Storage Temperature	-40oc~+60oc

